


7 Items to Assemble
1 Electrode Wiring Nut or Nut

A Inside bottom casing insert electrode and finger ignition with wing nut or nut.

View of electrode attached and aligned with a porthole in the burner.

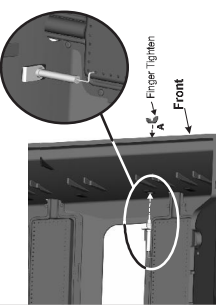

8 Items to Assemble
1 Control Panel
3 Screws


Loosen long wire and place behind front panel. Do not connect at this time.

- A Hold control panel close to bottom casing. Attach short ignitor wire to electrode.
- B Insert regulator into opening in front burner tubes.
- C Position valves into burner tubes (see burner-valve view). Rotate control panel up and rest flange over rail.
- D Attach control panel to legs with a screw in top hole. On the right side attach a screw in second hole.



Qty: 3

Burner Tubes




Correctly assembled burner tube and valve.



9 Items to Assemble
1 Shelf


A Shows a close up of the rectangle hole that holds the shelf in place. Press side seal firmly onto the rails until it is fully secured to the rails.

B Shows shelf properly attached.

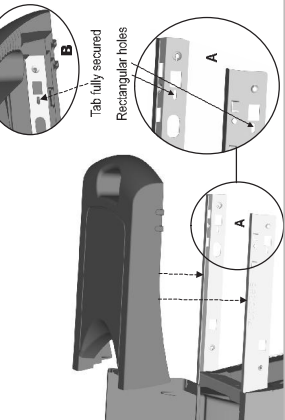

10 Items to Assemble
1 Sideburner Assembly
4 Screws
1 Sideburner Burner
1 Wing Nut
1 Sideburner Grate

- A Slide sideburner assembly onto rails. Attach with 4 screws.
- B Insert sideburner burner into sideburner body. Make sure valve fits into tube before attaching wing nut to sideburner burner.
- C Place sideburner grate onto sideburner body.





Sideburner tube and valve properly engaged.



Qty: 4




Qty: 1




Only 1 Wing nut required

11 Items to Assemble
1 Fascia
1 Screw

- A Insert tabs on fascia into 2 slots on sideburner assembly.
- B Fasten fascia into second hole through control panel and leg.
- C Attach long wire from electrode ignitor module to electrode on burner sideburner.

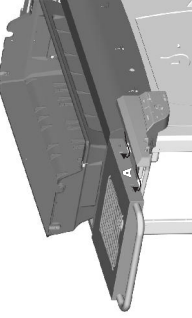


Looking underneath sideburner

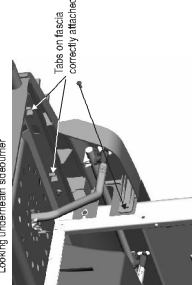

12 Items to Assemble
1 Top Casing
4 Shoulder Bolts
1 Handle
2 Wing Nuts
1 Ignitor Button
1 AAA Battery

- A Attach handle to top casing.
- B Attach top casing with shoulder bolts.
- C Insert 3 size of battery into ignitor module. Note correct position to hold ignitor button. Push on button once to engage seal. If back of button looks like D, push button onto ignitor module and turn right 1/4 turn to lock in place.
- E Place AAA battery in valve stems.



Back of button

Ignitor Button

Correct position




Back of button

Ignitor Button

Correct position

13 Items to Assemble
1 Top Casing
2 Cooking Grills
1 Warming Rack


- A Note correct position of vaporizer tents directly over burners.
- B Place cooking grids as shown.
- C Place warming rack in slots on bottom casing.

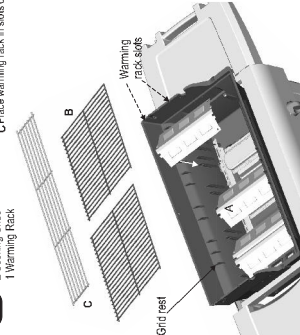

14 Items to Assemble
1 (purchased) LP Tank

LP tank is sold separately. Use only with an (over-all protection device) OPD equipped LP tank. Fill and leak check before attaching to grill and regulator.

Place LP tank into hole in bottom shelf. Tighten thumbscrew to hold LP tank securely in place.




Back of cart

See the Use & Care manual to correctly install the LP Tank. Leak test and do the Burner Flame Check.

15 Items to Assemble
1 Grease Tray Assembly
1 Grease Pan

A Slide grease tray into brackets on bottom casing.

B Slide grease pan into brackets on grease tray.

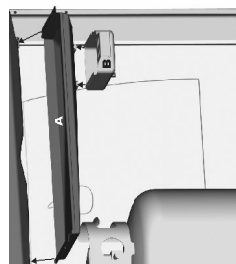

CAUTION

Failure to install the grease tray will cause hot grease to drip from bottom of grill with risk of fire or property damage.

You may have hardware left over after completing assembly of your grill. This is normal as in some cases we have included extra hardware to ensure you have enough.

CAUTION

Tank collar opening must face to front of cart once tank is attached.
Failure to install tank correctly may allow gas hose to be damaged in operation, resulting in the risk of fire.